

Make the move from CCTV to IP-based monitoring with the affordable Sony SNC-CS10 and SNC-CS11

The Sony SNC-CS10 and SNC-CS11 cameras are designed specifically for high-quality and affordable network-based monitoring. They combine high performance with value-added features such as built-in activity detection and pre-/post-alarm recording, and also boast a DC Servo Auto Iris Lens capability that makes them ideal for both indoor and outdoor use. Plus, because they are similar in size to CCTV cameras, you can install them using 8-inch camera housings.

Equipped with Sony progressive scan CCDs and advanced DSP technology, these cameras produce high-resolution images and deliver excellent color reproduction capabilities. They also support both JPEG and MPEG-4 compression formats for great flexibility when configuring your network environment or choosing an application.

For further efficiency and effectiveness in operating your IP monitoring system, these cameras offer a simultaneous access capability, a multicasting feature, and a choice of network security functions such as IP filtering and password protection.

If you want an affordable, feature-rich solution for your IP-based security and surveillance applications, the Sony SNC-CS10 and SNC-CS11 cameras are a perfect choice.

Sony Network Cameras

SNC-CS10 SNC-CS11



SNC-CS11

Connect Your Vision

IPELA™

FEATURES


- **Compact and Slim**
 - Design inherited from CCTV cameras
 - Fits 8-inch camera housings
- **DC Servo Auto Iris Lens capability – ideal for both outdoor and indoor use**
- **Sony progressive scan CCDs and advanced DSP technology – provides clear and detailed images while maintaining high sensitivity**
- **Variety of power options: AC 24 V, DC 12 V, or PoE (Power over Ethernet)*1**
 - Easy wiring with PoE (SNC-CS11 only)
- **Analog video output – ideal for use when adjusting the camera viewing angle during installation**
- **Flange-back adjustment – for precise and easy focus settings**
- **Choice of compression formats: MPEG-4 and JPEG**
- **Five preset JPEG picture-quality settings with constant bitrate algorithm**
 - Limits data bitrate while maintaining high-quality images
 - Ideal when network bandwidth is limited
 - Useful for calculating storage capacity and the required bandwidth during installation
- **Alarm function – with motion detection and pre-/post-alarm recording modes**
- **Bi-directional audio function (SNC-CS11 only)**
- **Aspherical vari-focal lens – eliminates spherical aberration and minimizes wide-angle distortion (SNC-CS11 only)**

*1 The SNC-CS10 does not support PoE.


SPECIFICATIONS

	SNC-CS10	SNC-CS11
Camera		
Image device	1/4-type Progressive Scan CCD	
Number of effective pixels	330,000 pixels (659 x 494)	
Electronic shutter	Auto/Manual, Slow shutter ON/OFF	
Gain control	Auto/Manual (0 dB to +18 dB)	
Exposure control	Auto Iris Lens/Manual Iris Lens	
White balance mode	ATW/Tungsten bulb/Daylight/One-push auto/Manual	
Lens type	—	CS-mount vari focal zoom lens
Zoom ratio	—	2.7x Optical zoom
Horizontal viewing angle	26.9 to 66.6 degrees	
Focal length	f=3.0 to 8.0 mm (F1.0 to F1.4)	
F-number	F1.0 (wide), F1.4 (tele)	
Other functions	Motion Detection, Pre-/post-alarm recording	
Image		
Image size (H x V)	640 x 480, 480 x 360, 384 x 288, 320 x 240, 256 x 192, 160 x 120 (JPEG, MPEG-4)	
Compression format	JPEG, MPEG-4	
Maximum frame rate	JPEG : 18 fps / MPEG4 : 15 fps (640 x 480)	
Audio		
Audio compression	G.711 (64 kbps)/G.726 (40, 32, 24, 16 kbps)	
Network		
Protocols	TCP/IP, HTTP, ARP, ICMP, FTP, SMTP, DHCP, SNMP(MIB2), DNS, NTP, RTP/RTCP, PPPoE	
Number of clients	JPEG: 20, MPEG-4: 10	
Interface		
Ethernet	10Base-T/100Base-TX (RJ-45)	
Analog video output	BNC x1, 1.0 Vp-p, 75 Ω	
I/O port	Sensor in x 1, Alarm out x 1	
External microphone input	—	Mini-jack (monaural, 2.2 K2.5 V plug-in power)
Audio line output	—	Mini-jack (monaural), max output level: 1 Vrms
Analog video output		
Signal system	NTSC/PAL (Composite)	
Horizontal resolution	400 TV lines	
S/N ratio	50 dB (AGC OFF)	
Min. illumination	Color: 1.7 lx (50 IRE, F1.0, AGC ON) Color: 0.034 lx (30 IRE, F1.0, AGC ON, 1 sec)	
General		
Mass	approx. 430 g (15 oz)	approx. 475 g (1 lb 1 oz)
Dimensions (W x H x D)	70 x 57 x 116 mm (2 7/8 x 2 1/4 x 4 5/8 inches)	70 x 57 x 158 mm (2 7/8 x 2 1/4 x 6 1/4 inches) Including lens
Power requirements	AC 24 V/DC 12 V	AC 24 V/DC 12 V/PoE
Power consumption	5.4 W max.	
Operating temperature	-10 to 50 °C (14 to 122 °F)	
Storage temperature	-20 to 60 °C (-4 to 140 °F)	
System requirements		
Operating system	Microsoft Windows 2000/XP	
Processor	CPU: Intel Pentium III 1 GHz or higher	
Memory	RAM: 256 MB or more	
Web browser	Microsoft Internet Explorer Ver. 6.0	
Supplied accessories		
	Screw, Wire rope, CD-ROM (users guide, IP setup program, SNC audio upload tool, SNC video player, Customer homepage installer), Installation manual, B&P Warranty booklet, Warranty sheet	


SYSTEM CONFIGURATION

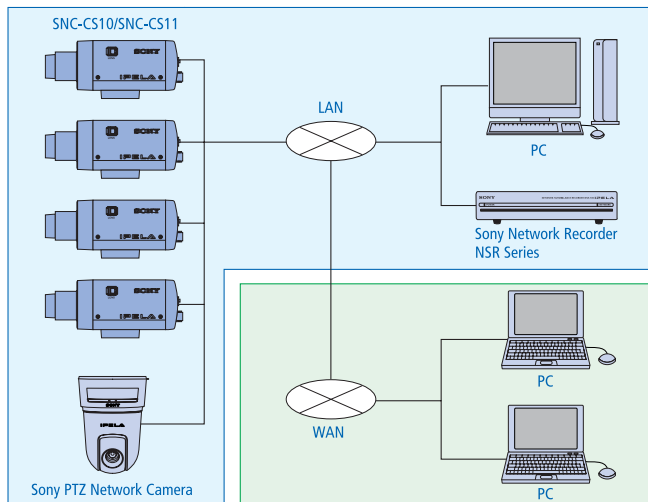

REAR PANEL LAYOUT




SNC-CS10



SNC-CS11

DIMENSIONS

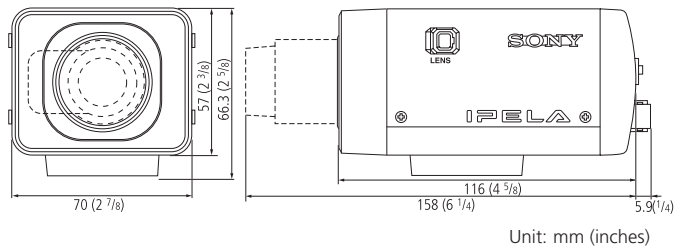

RECOMMENDED NETWORK RECORDERS



Network Surveillance Recorders

NSR Series (NSR-25/NSR-50/NSR-100)

Distributed by

©2007 Sony Corporation of Hong Kong Ltd. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. All non-metric weights and measurements are approximate. Sony is a registered trademark of Sony Corporation. IPELA is a trademark of Sony Corporation.